

Customised control stations, covered by type examination certificates, can be individually combined from CEAG's numerous built-in components.

ordering. The sum of the code numbers designates a complete control station.

A coding system for these components with unique designations can be used for planning, selection and

For the selection of control units and components, please see page 9.34 pp.

Cooper Crouse-Hinds © - all rights reserved

Double pushbutton DDT  
2-pole and 4-pole

Pushbutton DRT

Signal lamp SIL

Measuring instrument  
AM72

Mushroom-head  
pushbutton SGTE

Control switch SCT

Key-operated  
pushbutton SLT  
and key-  
operated  
switch SLS

Control switch GHG 23

Terminal block KLM











Potentiometer POT

## | Order Code for Individual Control Units |

Individual control units can be defined by 4 groups of components:
















1. Empty Enclosure
2. Components per mounting area
3. Accessories
4. Cable glands

### Code 1: Empty Enclosure

									
		Code for enclosure							
MA									411 81
MA									411 82
MA									411 83
MA									432
MA									434
MA									414 81
MA									414 82
MA									413 84
MA									413 85

### Code 2: Components per mounting area (max. 4)

A	C	D(1)	(D2)	E	F	Mounting area 1
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	MA1
A	C	D(1)	(D2)	E	F	Mounting area 2
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	MA2
A	C	D(1)	(D2)	E	F	Mounting area 3
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	MA3
A	C	D(1)	(D2)	E	F	Mounting area 4
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	MA4

		
Pushbutton DRT 2-pole	4-pole	Signal lamp SIL
		
Double-pushbutton DDT 2-pole	4-pole	Potentiometer POT
		
Key-operated pushbutton SLT 2-pole	4-pole	Control switch Ex 23
		
Key-operated switch SLS 2-pole	4-pole	Measuring instrument AM 45
		
Mushroom-head pushbutton SGTE	SGT	Terminal block KLM

Example: Enclosure Type 434,  
 Pushbutton (MA4),  
 Signal lamp (MA3)  
 Emergency stop  
 Mushroom head pushbutton (MA2)  
 Double pushbutton (MA1)

Code 1: 434..  
 Code 2 MA4: DRT 14 001  
 Code 2 MA3: SIL 1 10  
 Code 2 MA2 SGTE 13 1 1 2  
 Code 2 MA1: DDT15 001 007


Code 3 MA1: ZUB 19  
 Code 3 MA2: ZUB 19  
 Code 3 MA3: ZUB 02  
 Code 3 MA4: --  
 Code 4: GEH 1 GK M25 2

**Code 3: Lables and locking facilities**

A	B	C	Mounting area 1 MA1
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
A	B	C	Mounting area 2 MA2
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
A	B	C	Mounting area 3 MA3
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
A	B	C	Mounting area 4 MA4
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	




Label with holder  
ZUB 20




locking facility  
ZUB 14



locking facility with hammer  
ZUB 05



locking facility  
ZUB 12



locking facility double pushbutton  
ZUB 17

**Code 4: Cable entries and flanges**

A	B	C	D	E
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>




Metal flange plate  
FLM



plastic cable gland  
GK




plastic trumpet-shaped  
cable gland TR

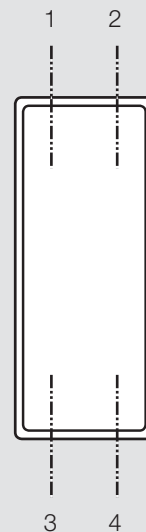

position for  
drilling/gland

## Built-in Components

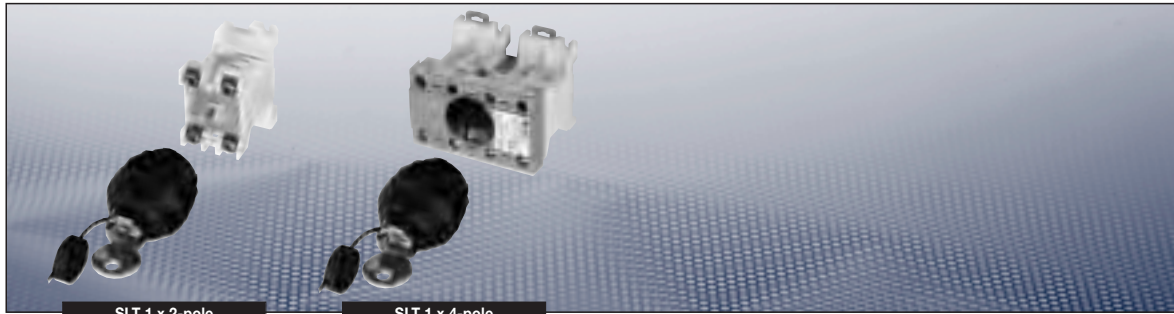

SLT 1 x 2-pole

SLT 1 x 4-pole

### Technical data

#### Ex-Key operated pushbutton SLT

Marking to 94/9/EC	Ⓔ II 2 G Ex de ia/ib IIC / Ⓔ I M 2 Ex de ia/ib I
EC-Type Examination Certificate	PTB 97 ATEX 1081 U
Application temperature	-20 °C to +40 °C -55 °C to +55 °C (option)
Rated voltage	500 V AC
Rated current	16 A
Rated current gold contacts	0.4 A
Switch rating	400 V / 16 A AC-1 / 400 V / 4 A AC-11
Degree of protection accd. EN 60529	IP66
Type of mounting	DIN rail mounting
Enclosure colour	grey
Gasket material	Neoprene (Standard), Fluoric Silicone or Viton on request
Latch point	CEAG 1 (others on request)

#### 2-pole Version

Connecting terminals	2 x 2.5 mm <sup>2</sup>
Dimensions (L x W x H)	59 x 31 x 45 mm
Weight	0.15 kg


#### 4-pole Version

Connecting terminals	4 x 2.5 mm <sup>2</sup>
Dimensions (L x W x H)	59 x 73 x 45 mm
Weight	0.35 kg

<sup>1)</sup> The 4-pole pushbutton needs two mounting areas of a 2-pole pushbutton.  
The actuator will be in the middle of the two mounting areas.

### Example for ordering code (Code 2)

Version	Contact arrangement	Code	Ordering Code			
			A	B	C	D
Key switch with silver contact points						
Version with contact function: lockable/removeable/lockable/removable (code 10)						
2 NC	2 NC	13	SLT	0	13	10
2 NO	2 NO	14	SLT	0	14	10
1 NO + 1 NC	1 NO + 1 NC	15	SLT	0	15	10
2 NO + 2 NC	2 NO + 2 NC	22	SLT	0	22	10
4 NC	4 NC	20	SLT	0	20	10
4 NO	4 NO	24	SLT	0	24	10
3 NO + 1 NC	3 NO + 1 NC	21	SLT	0	21	10
1 NO + 3 NC	1 NO + 3 NC	23	SLT	0	23	10
Key switch with gold contact points						
Version with contact function: lockable/removeable/lockable/removable (code 10)						
2 NO + 2 NC	2 NO + 2 NC	27	SLT	0	27	10
4 NC	4 NC	25	SLT	0	25	10
4 NO	4 NO	29	SLT	0	29	10
3 NO + 1 NC	3 NO + 1 NC	26	SLT	0	26	10
1 NO + 3 NC	1 NO + 3 NC	28	SLT	0	28	10

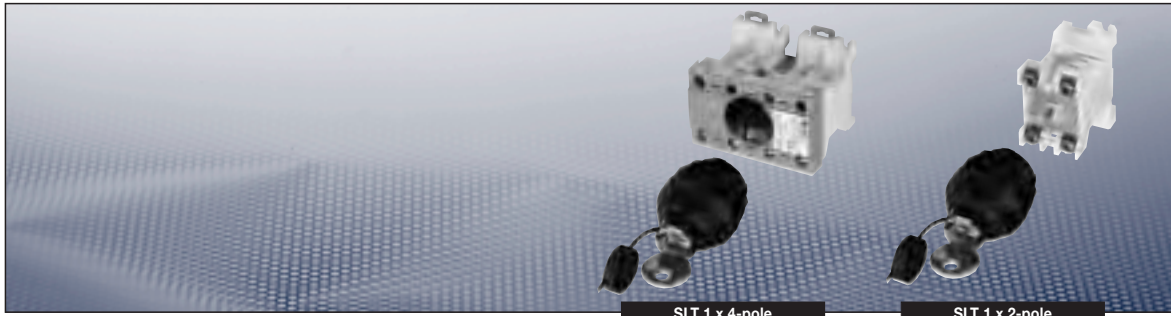

**Ordering code for Component (Code 2)**

Code	Component	Code
A	Key operated pushbutton	SLT

Code	Contact system	Contacts	Code	
			silver contact points	gold contact points
C	2 NC		13	16
	2 NO		14	17
	1 NO + 1 NC		15	18
	4 NO		20	25
	1 NC + 3 NO		21	26
	2 NC + 2 NO		22	27
	3 NC + 1 NO		23	28
	4 NC		24	29

Code	Function	Pushbutton not pressed	Key	Pushbutton pressed	Key	Code
D		lockable	removable	lockable	removable	10
		lockable	removable	lockable	not removable	11
		lockable	removable	not lockable	not removable	12
		lockable	not removable	lockable	removable	13
		not lockable	not removable	lockable	removable	14
		not lockable	removable	auto lockable	removable	15

Cooper Crouse-Hinds © 2009 - all rights reserved