

SOS sign type Robust

Design: SafeEXIT A/S

Application:


SOS sign for road and traintunnels.

Mechanical data:

Housing:	Stainless steel AISI 316L
Piktogrammer:	Clear makrolon with folie.
Cableglands:	2 x M25
IP class:	IP66
Isolations class:	Class I or II
Mounting:	Directly on wall
Reading distance:	50 meter
Ambient temperature:	-20°C - +40°C

Electrical data:

Powersupply:	230AC/DC 50 Hz
LED driver:	Prim/sec. 240AC/DC - 12DC
Total power consumption:	8 watt.
Light source:	2 x LED strip
Fuse:	1 x 2A T 5X20
Terminals:	6/10mm ² 2 x L1, L2, L3, N, PE/FE

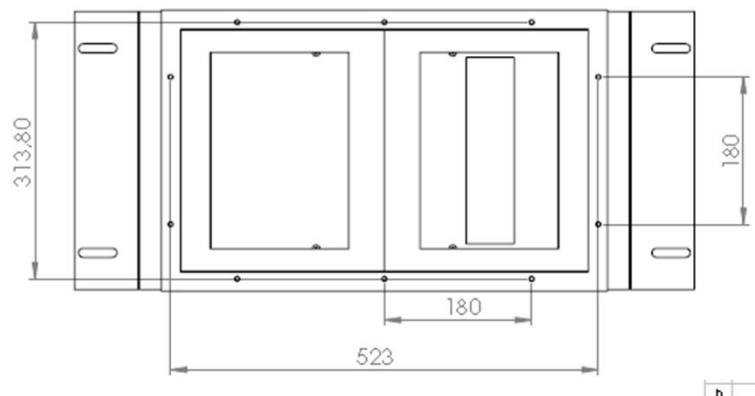

LED

IP66



Herstedøstervej 19
DK - 2600 Glostrup
Telephone +45 43455010
Telefax +45 43455011
www.safeexit.dk

SAFEEXIT^{a/s}

1234