

SafetyGuide

Design: SafeExIT A/S

Application:




Evacuation route marker lights for roadtunnels.

Mechanical data:

Housing:	Stainless steel AISI 316L
Cable gland:	1 x M20
IP class:	IP66
Isolations class:	Class I or II
Mounting:	Vertical on wall
Ambient temperature:	-20°C - +40°C

Electrical data:

Power supply:	230V AC 50 Hz
Total power consumption:	10 watt.
Light source:	6 x LED
LED color temperture:	4000 - 5000kelvin
Dimmerble driver:	Down to I max 40cd

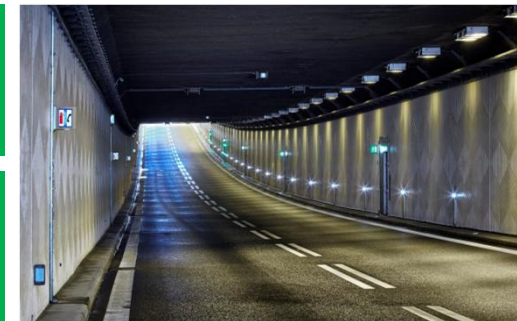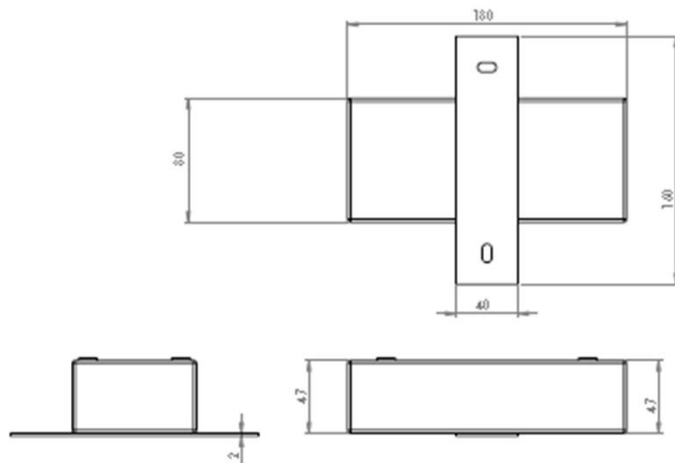

Herstedoestervej 19
DK - 2600 Glostrup
Telephone +45 43455010
Telefax +45 43455011
www.safeexit.dk

SAFEEXIT^{a/s}

1234