

SafetyCube LED

Design: SafeEXIT A/S

Application:


Paniclight for metro- and traintunnels

Mechanical data:

Housing:	Stainless steel AISI 316L
Cable glands:	2xM32 kabel \varnothing 17 - 25mm
IP class:	IP66
Isolation class:	Class I or II
Mounting:	Direct on handrail bracket.
Mouting height:	Approx. 0,9 meter
Ambiant temperature:	-20°C - +40°C
Spacing:	Approx . 10 meter


Electrical data:

Power supply:	230V AC 50 Hz
Power consumption:	10 watt.
Light source:	6 x 1,5 watt LED
Lightdistribution:	LED lenz
Color temp.:	4000 - 5600 kelvin
Fuse:	1 x 2A T 5X20
Loop terminalers:	4x2x6mm ² (fireproof)

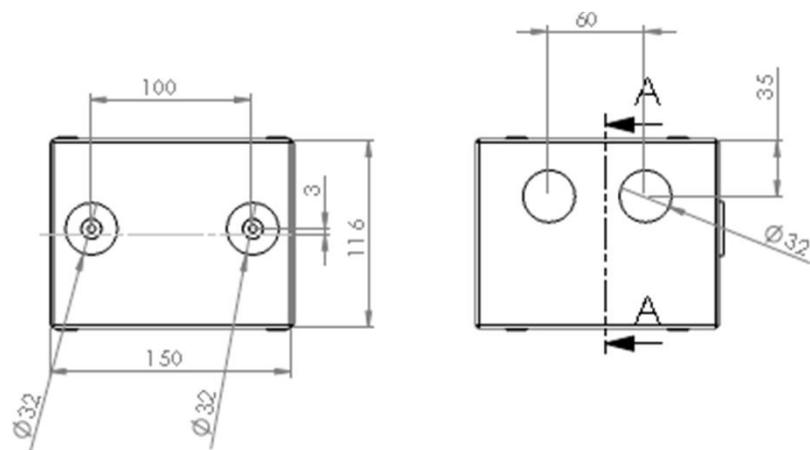

LED

IP66

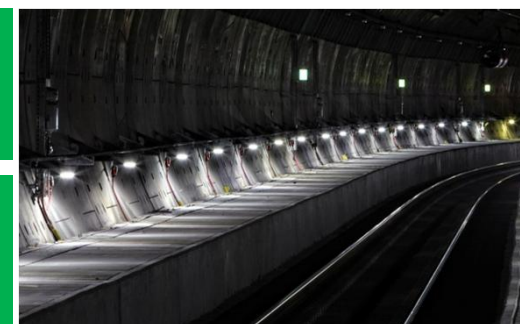

Herstedoestervej 19
DK - 2600 Glostrup
Telephone +45 43455010
Telefax +45 43455011
www.safeexit.dk

SAFEEXIT[®] a/s

1234