

# VandaLite

Design: SafeEXIT A/S

## Application:




Tunnel- and servicelighting, for traintunnels.

## Mechanical data:

Material housing:	Die-cast aluminium body
Material cover:	Polycarbonat diffuser
Fixation of cover:	6 x stainless 5mm Unbraco
Cable gland:	1 x M20
Cable entry:	2 X M20
IP class:	IP66
Mounting:	Wall – ceiling or on a vertical cableladder
Ambient temperature:	-20°C - +40°C

## Electrical data:

Powersupply:	230V AC 50 Hz
Power consumption:	30 watt.
Lightsources:	LED
Color temp.:	4000 kelvin
Insulation class:	Class I or II

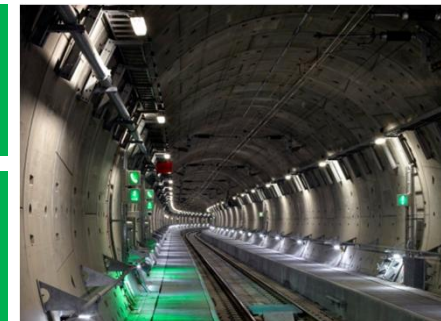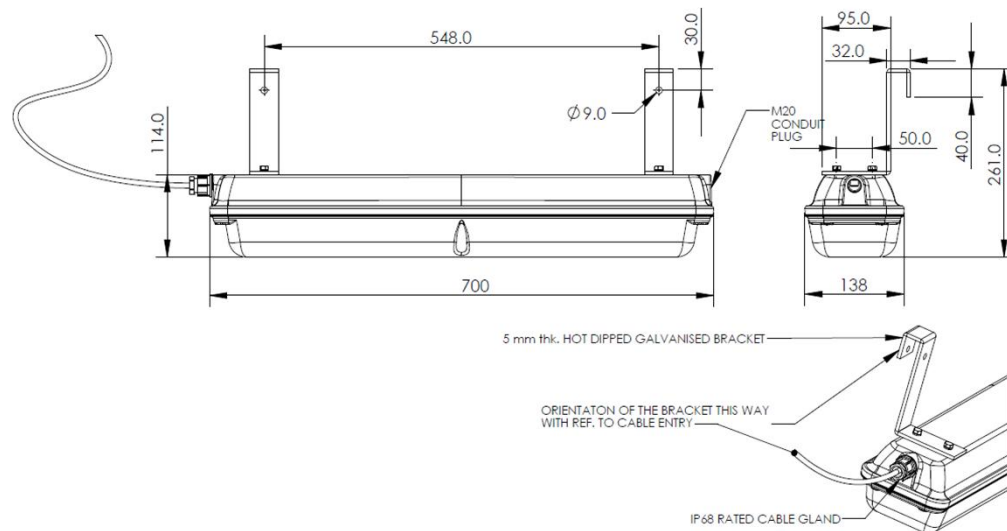

Herstedoestervej 19  
DK - 2600 Glostrup  
Telephone +45 43455010  
Telefax +45 43455011  
www.safeexit.dk

SAFEEXIT<sup>a/s</sup>

1234